



A Division of SCARECROW BIO-ACOUSTIC SYSTEMS LIMITED

INSTALLATION INSTRUCTIONS : VP892

Thank you for buying **VP892**, a Vandal proof microphone, designed for close talk use, with **push switch** and **'active' led** mounted on a UK double switchplate.

VP892 is designed to fit on UK double switchplate back boxes of at least 40mm depth.

The switchplate is manufactured from stainless steel with integrally bonded stainless steel microphone grille; the entire assembly is showerproof, including the vandal resistant switch and 4mm LED.


When not in use, the microphone capsule is shorted; a separate pair of 'dry' contacts close when the CALL BUTTON is pressed. These contacts can be used for systems access, or electronic input gating.

The plug-on screw terminations allow for system wiring to be completed prior to installing VP892.

Please ensure that cabling is positioned clear of the microphone shock mount, constructed as a foam sandwich.

PLEASE NOTE:

1. A resistor is fitted in series with the LED, so that this may be operated from 15/24V d.c.; *please observe polarity*.
2. To retain the finish of this product wipe over with a soft cloth, using non abrasive wax polish.
3. TAKE CARE TO ENSURE THAT THE BACK BOX AND SWITCHPLATE ARE GROUNDED (EARTHED) TO THE SYSTEM GROUND.

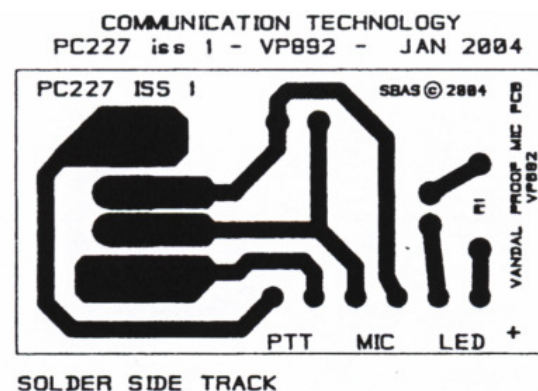

CT Manuals / VP892

PO Box 66, Uckfield, East Sussex, TN22 3ZR, England
Telephone: +44(0) 1825 766363 Fax: +44(0) 1825 766361 UK Freephone: 0800 917 8488
E-mail: sales@communication-technology.co.uk Website: www.communication-technology.co.uk

REGISTERED IN ENGLAND NO. 01568506 VAT REGISTRATION NO. GB680 0269 46
REGISTERED OFFICE: 8 LONSDALE GARDENS, TUNBRIDGE WELLS, TN1 1NU