

# **Buddy Desk Paging Microphones**







# **BUDDY DESK PAGING MICROPHONES**

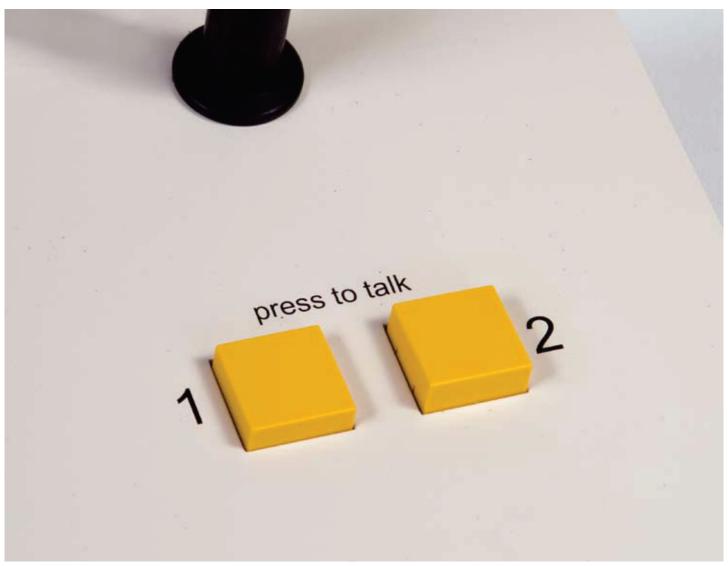

# FOR DESK PAGING MICROPHONES INCORPORATING LINE PRE-AMPLIFIER AND GONG OPTIONS PLEASE REFER TO PRO-RANGE, DPM SERIES LEAFLET

# TECHNICAL SPECIFICATION BUD100 Single Zone BUD200 Two Zone

### Press to talk

'Soft touch', momentary action, push button (two on two zone)

#### Cabling supplied

2.5 metre screened, comprising microphone pair plus access/ signalling pair

# **Dimensions**

Base – 140mm depth x 110mm width x 40mm maximum height Gooseneck – 260mm

#### Finich

Desk Top – Pearl white powder coat Desk Base – Satin black powder coat Gooseneck & microphone – Matt black

### **Order Codes**

BUD100 – Single zone, moving coil microphone BUD100/E – Single zone, electret microphone BUD200 – Two zone, moving coil microphone BUD200/E – Two zone, electret microphone

#### MOVING COIL (STANDARD) MICROPHONE

Sensitivity

Suitable for all amplifiers with at least 500uV (0.5mV) sensitivity

#### Impedance

600ohms

#### Characteristics

Polar diagram approximates to cardioid, presence lift at 3KHz

# Frequency Response

±6dB: 100Hz to 8KHz

#### C100 ELECTRET (OPTION)

#### Sensitivity

Suitable for all amplifiers with at least 1mV sensitivity.

#### Impedance

600ohms unbalanced

#### Characteristics

Omni-directional

#### Polarizing voltage

4.5 to 15.0v maximum, applied between polarizing lead and ground.

PO Box 66, Uckfield, East Sussex TN22 3ZR, UK

Telephone: +44 (0)1825 766363

UK Freephone: 0800 917 8488 Fax: +44 (0)1825 766361

Email: sales@communication-technology.co.uk Web: www.communication-technology.co.uk







